

To start your Park Zone micro Mustang modification remove the top half of the fuselage. Note that in the photos, the sticker trim was removed. this was a mistake because it also removed the paint requiring re-painting and loss of the trim. Cut the black portion of the foam canopy away with a slight inward angle. Next, cut away the foam "rib" on the inside of the fuselage. They are very small and can simply be picked out.




There is a portion of plastic between the pilot and instrument panel called "webbing" there is nothing that can be done about this defect except remove it before painting. Use a hobby knife to remove the plastic in small crescent cuts until it is gone. Paint the cockpit insert to suit your taste. ( There is a tutorial available on the site in the same location you downloaded these instructions.)



Use a small amount of epoxy to bond the insert to the inside of the fuselage shell two drops at the Location tabs is all that's needed.



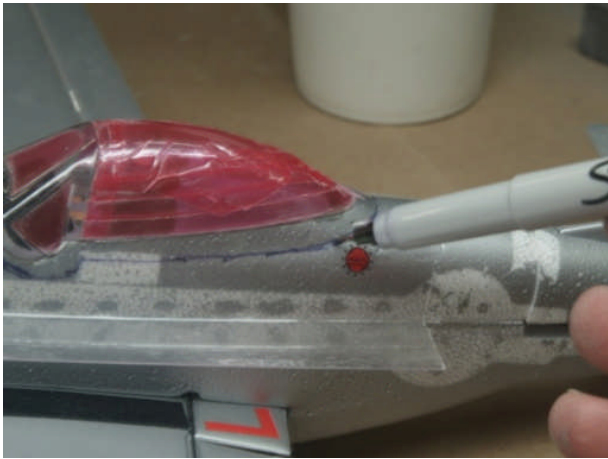

To install the canopy: Cut the ends off the canopy and fit it in position on the fuselage matching the aft canopy bump. Use a sharpie pen to mark the cut line leaving about 3/16 from the cockpit "hole" for a good bond area. Now would be the best time to tape off and paint the canopy unless you intend to paint the whole fuselage. Use epoxy or silicone to attach the canopy to the fuselage. Note that Glad press and seal sandwich wrap will stick to the foam and not remove paint. It makes the perfect masking film for his project.